CONCRETE REPAIR / HOPPER

WAGNER SUPERFINISH 23 PRO (INJECTION)

Compact, powerful diaphragm pump for precise injection of polyurethane (PU), SPUR foams and water-based solutions. Proven QLS long-stroke technology delivers consistent output, durability and long service life.

- 0-250 BAR CONTROL
- FAST 5L MATERIAL CHANGES
- STAINLESS PRESSURE RELIEF

DIAPHRAGM PUMP

250 BAR




2.6 L/min

37 kg

QLS LONG-STROKE TECHNOLOGY / SMOOTH PRESSURE / PRECISE INJECTION

TECHNICAL DATA

MAX NOZZLE SIZE	0.023 in
MAX DELIVERY RATE	2.6 L/min
OPERATING PRESSURE	250 bar
MOTOR OUTPUT	1.3 kW
VOLTAGE	230 V
TECHNOLOGY	Diaphragm
WEIGHT	37 kg

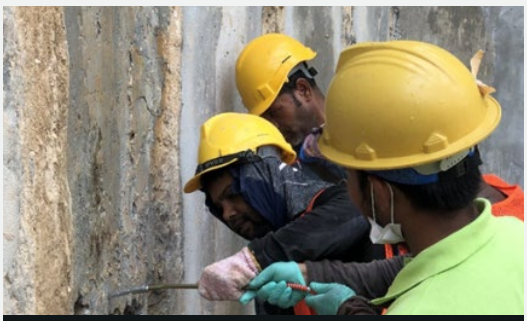

BUILT FOR CONCRETE REPAIR

Pressure relief at the unit and smooth fine adjustment support controlled, consistent injection on demanding job sites.